
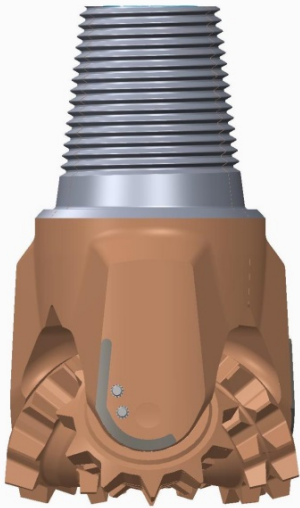


# 6" (2-3-1) (W5621)

## Product specification

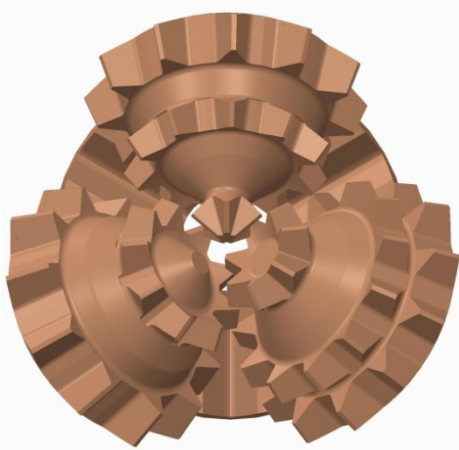

### Product Features

- Conventional gage teeth
- 1/3<sup>rd</sup> shirrtail protection for soft to medium hard and moderately abrasive formations

### Product Specifications

|                  |                      |                      |                               |
|------------------|----------------------|----------------------|-------------------------------|
| Size / Type      | 6"                   | Cutting structure    | ST                            |
| IADC             | 2-3-1                | Rows                 | 3- Gage / 5 – inner           |
| Pin Connection   | 3 1/2" API Regular   | Teeth count          | 36– Gage / 43- Inner          |
| Bearing          | Roller Ball Friction | Teeth Type           | Straight                      |
| Circulation type | Centre Flush         | Gage Protection      | Hard facing                   |
| Product weight   | 12.5 kg              | Shirrtail protection | 1/3 <sup>rd</sup> Hard facing |
| Nozzle           | -NA-                 | Shirrtail insert     | Serrated                      |

### Operating parameters

Weight on Bit : 18,000 – 30,000 lbs.  
 Rotary Speed (RPM) : 60 –100 RPM  
 Rock UCS : Between 2,500 to10,000 PSI

*Operating parameters are typical ranges and may vary depending on ground conditions*